


Oscillographic display for ELWO crack detection

- to be used in production line or laboratory as well
- no adjustments necessary, all automatic
- no user manual, no lengthy study required
- automatically adopts to continuous and discontinuous measurement mode (Messtakt)
- may replace usual digital oscilloscopes of upto 3000 Euro

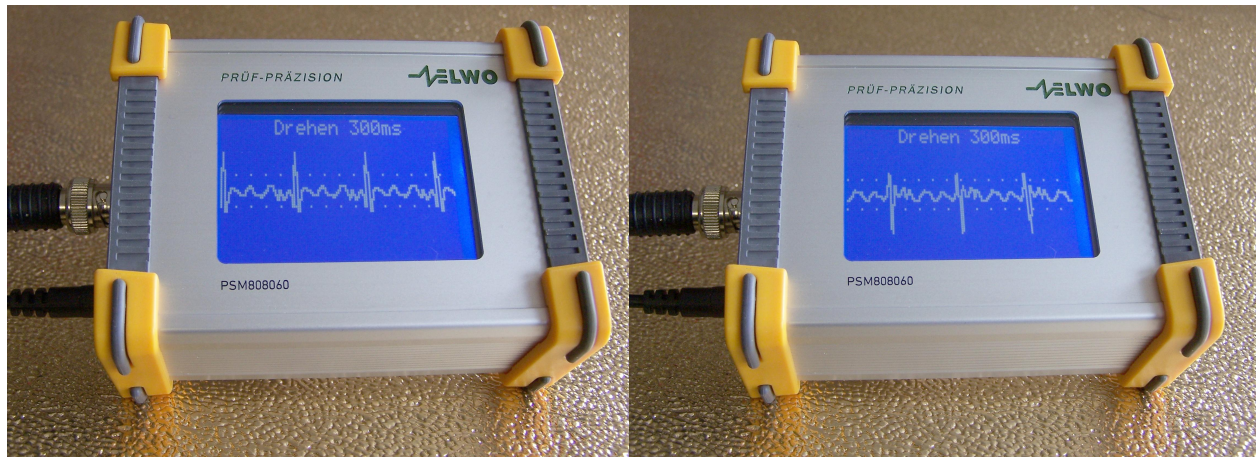

technical data

- low power consumption, around 3 Watt
- to be used with wall plug power supply 230V / 7 bis 12V DC 300mA (included)
- bright long life backlight (white LEDs)
- modern design
- meets EMV standards
- IP65 protected (tolerates dirt, oil or sprinkling water)
- size (without connectors) height x width x depth 113 x 90 x 52mm
- simple connection to ELWO RI through BNC cable 1m ... 10m

